


**OPU205**

OPU-FPKG/AS

Photoelectric sensors

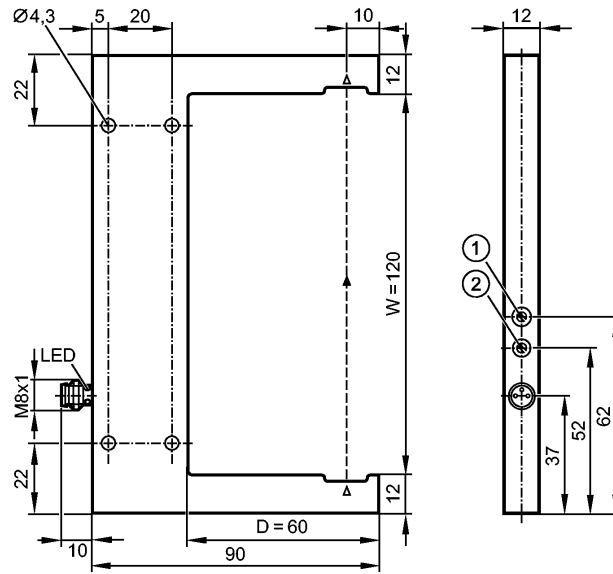

1: potentiometer sensitivity  
2: output function switch



**Product characteristics**

Optical fork sensor

Connector

**Electrical data**

Electrical design		DC PNP
Operating voltage	[V]	10...35 DC
Current consumption	[mA]	< 30
Type of light		Red light 660 nm
Protection class		III
Reverse polarity protection		yes

**Outputs**

Output function		light-on/dark-on mode selectable
Voltage drop	[V]	< 2.8
Current rating	[mA]	200
Short-circuit protection		pulsed
Overload protection		yes
Switching frequency	[Hz]	2000

**Range**

Smallest detectable object	[mm]	0.8
----------------------------	------	-----

**Environment**

Ambient temperature	[°C]	-25...60
Protection		IP 67

**Tests / approvals**

EMC		EN 60947-5-2
MTTF	[Years]	556

**Mechanical data**

Fork depth D	[mm]	60
--------------	------	----

## OPU205

OPU-FPKG/AS

Photoelectric sensors

Fork width W	[mm]	120
Housing materials		housing: diecast zinc black anodised; lens: glass
Weight	[kg]	0.288


### Displays / operating elements

Output status indication	LED	yellow
--------------------------	-----	--------

### Electrical connection

Connection		M8 connector
------------	--	--------------

### Wiring



### Remarks

Pack quantity	[piece]	1
---------------	---------	---