


# E11974



## Connection cable

cable Plus and Minus crossed

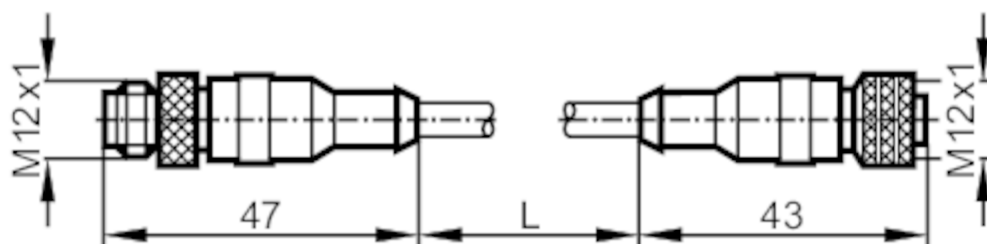

### Application

|                    |                                                                                                     |
|--------------------|-----------------------------------------------------------------------------------------------------|
| Special feature    | Free from silicone; Halogen-free; Gold-plated contacts                                              |
| Design             | for sensors programmable via wiring to change the polarity of the supply voltage on pin 1 and pin 3 |
| Free from silicone | yes                                                                                                 |

### Electrical data

|                         |     |                     |
|-------------------------|-----|---------------------|
| Operating voltage       | [V] | < 250 AC / < 300 DC |
| Max. current load total | [A] | 3                   |

### Operating conditions

|                     |      |          |
|---------------------|------|----------|
| Ambient temperature | [°C] | -25...85 |
| Protection          |      | IP 68    |

### Mechanical data

|                       |     |                      |
|-----------------------|-----|----------------------|
| Weight                | [g] | 39.7                 |
| Materials             |     | PUR                  |
| Moulded-body material |     | PUR                  |
| Material nut          |     | brass, nickel-plated |

### Remarks

|               |  |        |
|---------------|--|--------|
| Pack quantity |  | 1 pcs. |
|---------------|--|--------|



## Connection cable

cable Plus and Minus crossed

### Electrical connection - plug


Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm



### Electrical connection

Cable: 0.3 m, PUR, Halogen-free, black, Ø 4.7 mm; 4 x 0.34 mm<sup>2</sup> (42 x Ø 0.1 mm )

### Connection

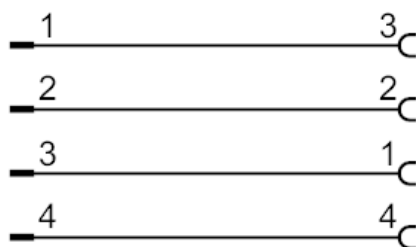

### Electrical connection - socket

Connector: 1 x M12, straight; coding: A; Moulded body: PUR; Locking: brass, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm

