


**DL0201**

L200/LM-1/110-240VAC 24VDC



- 1. Screw Terminals
- 2. Labelling Field
- 3. Potentiometer
- 4. Rail Mounting

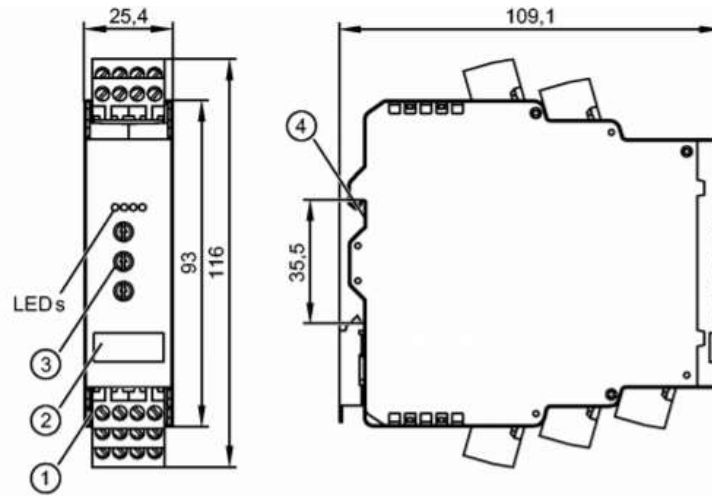

**Product characteristics**

Housing housing for DIN rail mounting

**Application**

Application Protection of a tank against overspill or dry run

**Electrical data**

Operating voltage tolerance 2 [%]	> 20
Nominal voltage AC [V]	110...240
Nominal voltage DC [V]	27
Nominal voltage tolerance [%]	> 20
Nominal voltage tolerance 2 [%]	20...10
Nominal frequency AC [Hz]	50...60
Insulation rating [V]	9
Max. power consumption AC [W]	6
Max. power consumption DC [W]	4
Auxiliary energy for sensors DC [V]	18.5...30; (SELV, ≤ 100 mA)

**Inputs / outputs**

Number of inputs and outputs Number of digital outputs: 1; Number of relay outputs: 1

**Outputs**

Number of digital outputs	1
Number of relay outputs	1
Contact rating	4 A (240 V AC, 24 V DC); (ohmic resistance)
Short-circuit proof	yes

**DL0201**

L200/LM-1/110-240VAC 24VDC

Operating conditions		
Ambient temperature [°C]	-25...60	
Storage temperature [°C]	-25...70	
Max. relative air humidity [%]	80; (40 °C: 50 % non condensing)	
Max. height above sea level [m]	2000	
Protection	IP 20	
Protection rating terminals	IP 20	
Degree of soiling	2; ( $\leq 240$ V AC)	
Tests / approvals		
MTTF [years]	224	
UL approval	UL Approval no.	N001
Mechanical data		
Weight [g]	242.5	
Housing	housing for DIN rail mounting	
Type of mounting	rail; (TH35 EN 60715)	
Materials	plastics: PC-GF20	
Displays / operating elements		
Display	voltage supply	1 x LED, green
	input	1 x LED, yellow
	Output	1 x LED, green
	enable signal	1 x LED, yellow
Accessories		
Items supplied	connector: 5 x 4-pole, with screw connection, E40173	
Electrical connection		
Connection	pin headers: 4 x ; Spacing: 5.0 mm	

ifm electronic gmbh • Friedrichstraße 1 • 45128 Essen — We reserve the right to make technical alterations without prior notice. — EN-GB — DL0201-00 — 13.02.2015 —