


NS501A



Induktiver NAMUR-Sensor

IS-2002-N/12M/1D/1G/2G

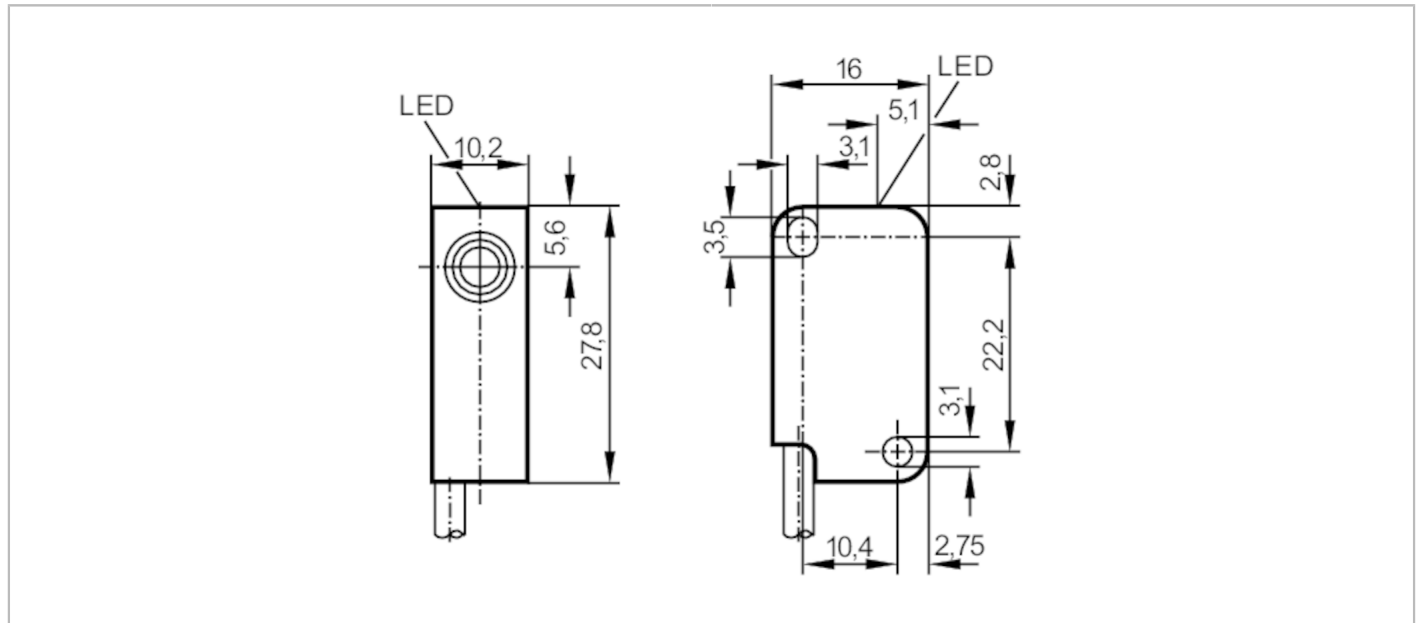

Product characteristics	
Electrical design	NAMUR
Output function	normally closed
Sensing range [mm]	2
Housing	rectangular
Dimensions [mm]	28 x 10 x 16
Electrical data	
Connection to switching amplifiers	yes
Switching amplifiers	connection to certified intrinsically safe circuits with the max. values: U = 15 V / I = 50 mA / P = 120 mW
Nominal voltage DC [V]	8.2; (1kΩ)
Supply voltage DC [V]	7.5...30; (when used outside the hazardous area)
Current consumption [mA]	< 1; (disabled; conductive: > 2,1)
Protection class	III
Outputs	
Electrical design	NAMUR
Output function	normally closed
Permanent current rating of switching output DC [mA]	30; (when used outside the hazardous area)
Switching frequency DC [Hz]	800
Detection zone	
Sensing range [mm]	2
Real sensing range Sr [mm]	2 ± 10 %
Accuracy / deviations	
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis [% of Sr]	1...15

NS501A



Induktiver NAMUR-Sensor

IS-2002-N/12M/1D/1G/2G

Switch point drift	[% of Sr]	-10...10
--------------------	-----------	----------

Operating conditions

Ambient temperature	[°C]	-20...70
---------------------	------	----------

Protection		IP 67
------------	--	-------

Tests / approvals

Approval	PTB 02 ATEX 2217; BVS 04 ATEX E153; IECEx BVS 06.0003	
----------	---	--

ATEX marking	Ⓔ II 1G Ex ia IIB T6 Ga Ta: -20...70° C	
--------------	---	--

	Ⓔ II 2G Ex ia IIC T6 Gb Ta: -20...70° C	
--	---	--

	Ⓔ II 1D Ex ia IIIC T90° C Da Ta: -20...70° C	
--	--	--

EMC	EN 60947-5-6	
-----	--------------	--

Shock/vibration resistance	30 g (11 ms) / 10-55 Hz (1 mm)	
----------------------------	--------------------------------	--

MTTF	[years]	4494
------	---------	------

Safety classification

Max. internal capacitance	[nF]	85
---------------------------	------	----

Max. internal inductance	[μH]	120
--------------------------	------	-----

Mechanical data

Weight	[g]	206
--------	-----	-----

Housing	rectangular	
---------	-------------	--

Mounting	flush mountable	
----------	-----------------	--

Dimensions	[mm]	28 x 10 x 16
------------	------	--------------

Materials	PBT	
-----------	-----	--

Displays / operating elements

Display	switching status	1 x LED, red
---------	------------------	--------------


Remarks

Pack quantity	1 pcs.	
---------------	--------	--

Electrical connection

Cable: 12 m, PVC; 2 x 0.14 mm²

Connection

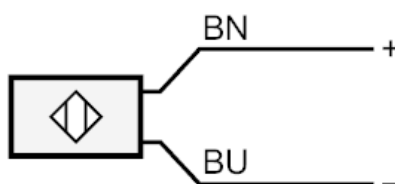

Core colours :
BN = brown
BU = blue