


IG5817



Inductive sensor

IGB3008-BPKG/V4A/US-100-DPS/AU

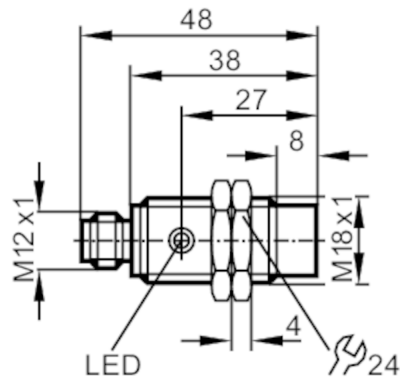

Product characteristics

| | | |
|-------------------|------|------------------|
| Electrical design | | PNP |
| Output function | | normally open |
| Sensing range | [mm] | 8 |
| Housing | | threaded type |
| Dimensions | [mm] | M18 x 1 / L = 48 |

Application

| | | |
|-----------------|--|--|
| Special feature | | Gold-plated contacts |
| Application | | Industrial applications / factory automation |

Electrical data

| | | |
|-----------------------------|------|------------|
| Operating voltage | [V] | 18...36 DC |
| Current consumption | [mA] | 15; (24 V) |
| Protection class | | II |
| Reverse polarity protection | | yes |

Outputs

| | | |
|---|------|-----------------------|
| Electrical design | | PNP |
| Output function | | normally open |
| Max. voltage drop switching output DC | [V] | 2.5 |
| Permanent current rating of switching output DC | [mA] | 125; (150 (...50 °C)) |
| Switching frequency DC | [Hz] | 200 |
| Short-circuit protection | | yes |
| Type of short-circuit protection | | pulsed |
| Overload protection | | yes |

Detection zone


| | | |
|--------------------------|------|---------------|
| Sensing range | [mm] | 8 |
| Real sensing range S_r | [mm] | $8 \pm 10 \%$ |
| Operating distance | [mm] | 0...6.5 |

IG5817



Inductive sensor

IGB3008-BPKG/V4A/US-100-DPS/AU

| Accuracy / deviations | | |
|---|---|-----------------|
| Correction factor | steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2 | |
| Hysteresis [% of Sr] | 1...15 | |
| Switch point drift [% of Sr] | -10...10 | |
| Operating conditions | | |
| Ambient temperature [°C] | -25...80 | |
| Protection | IP 67 | |
| Tests / approvals | | |
| EMC | EN 60947-5-2 | |
| | EN 55011 | class B |
| MTTF [years] | 2283 | |
| Mechanical data | | |
| Weight [g] | 45.5 | |
| Housing | threaded type | |
| Mounting | non-flush mountable | |
| Dimensions [mm] | M18 x 1 / L = 48 | |
| Thread designation | M18 x 1 | |
| Materials | stainless steel (1.4571/316Ti); CO-PC | |
| Displays / operating elements | | |
| Display | switching status | 1 x LED, yellow |
| Accessories | | |
| Items supplied | lock nuts: 2 | |
| Remarks | | |
| Pack quantity | 1 pcs. | |
| Electrical connection - plug | | |
| Connector: 1 x M12; coding: A; Contacts: gold-plated | | |
|  | | |

IG5817



Inductive sensor

IGB3008-BPKG/V4A/US-100-DPS/AU

Connection

