


ZDO4H050MSS0000-00STAK190MSS

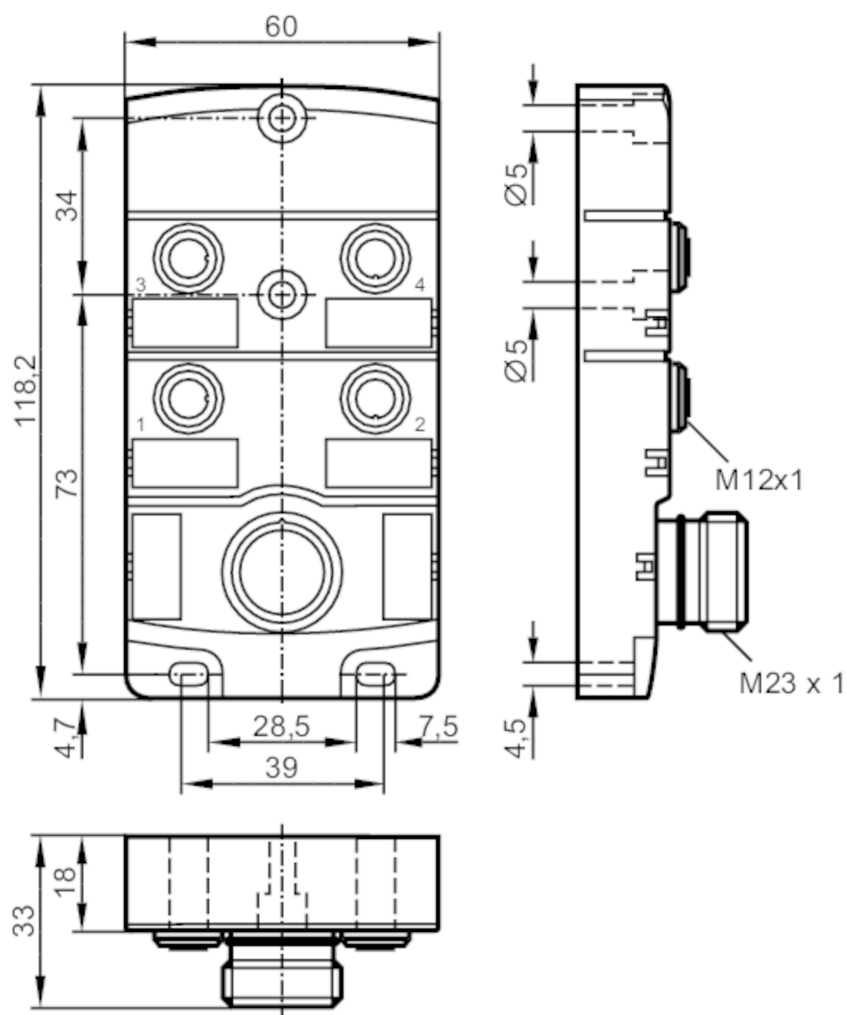

Free from silicone; Gold-plated contacts

yes

< 30 DC; ("supply class 2" to cULus)

4

10

-25...80



## Splitter box

ZDO4H050MSS0000-00STAK190MSS

|            |       |
|------------|-------|
| Protection | IP 67 |
|------------|-------|

### Tests / approvals

|             |                |        |
|-------------|----------------|--------|
| UL approval | Enclosure type | Type 1 |
|-------------|----------------|--------|

### Mechanical data

|                              |      |                 |
|------------------------------|------|-----------------|
| Weight                       | [g]  | 226.5           |
| Dimensions                   | [mm] | 33 x 60 x 118.2 |
| Materials                    |      | PA              |
| Moulded-body material        |      | PA              |
| Number of ports splitter box |      | 4               |
| Connector type               |      | M12             |

### Accessories


|                |                    |
|----------------|--------------------|
| Items supplied | Protective caps: 2 |
|                | labels: 4          |

### Remarks

|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

### Electrical connection - Connection

Connector: 1 x M23; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm



### Connection

|   |    |           |
|---|----|-----------|
| + | 19 | 1 (1...4) |
| - | 6  | 3 (1...4) |
| ⏏ | 12 | 5 (1...4) |
|   | 15 | 4 (1)     |
|   | 7  | 2 (1)     |
|   | 5  | 4 (2)     |
|   | 4  | 2 (2)     |
|   | 16 | 4 (3)     |
|   | 8  | 2 (3)     |
|   | 3  | 4 (4)     |
|   | 14 | 2 (4)     |



## Splitter box

ZDO4H050MSS0000-00STAK190MSS

### Electrical connection - slot

Connector: 4 x M12; coding: A; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

