


OPU201

OPU-FPKG/AS

Photoelectric sensors

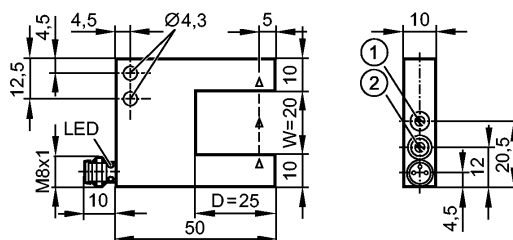

- 1: potentiometer sensitivity
2: output function switch


Product characteristics

Optical fork sensor

Connector

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...35 DC
Current consumption [mA]	< 30
Type of light	Red light 660 nm
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	light-on/dark-on mode selectable
Voltage drop [V]	< 2.8
Current rating [mA]	200
Short-circuit protection	pulsed
Overload protection	yes
Switching frequency [Hz]	4000

Range

Smallest detectable object [mm]	0.4
---------------------------------	-----

Environment

Ambient temperature [°C]	-25...60
Protection	IP 67

Tests / approvals

EMC	EN 60947-5-2
MTTF [Years]	570

Mechanical data

Fork depth D [mm]	25
Fork width W [mm]	20
Housing materials	housing: diecast zinc black anodised; lens: glass
Weight [kg]	0.07

Displays / operating elements

Output status indication LED	yellow
------------------------------	--------

Electrical connection



Connection	M8 connector
------------	--------------

Wiring

OPU201

OPU-FPKG/AS

Photoelectric sensors



Remarks

Pack quantity [piece] 1

ifm electronic gmbh • Friedrichstraße 1 • 45128 Essen — We reserve the right to make technical alterations without prior notice. — GB — OPU201 — 16.02.2009