


IT5042



Inductive sensor

ITB3002BBPKG/V4A/2M



Product characteristics	
Electrical design	PNP
Output function	normally open
Sensing range [mm]	2
Housing	cylindrical
Dimensions [mm]	Ø 6.5 / L = 27
Electrical data	
Operating voltage [V]	10...30 DC
Current consumption [mA]	< 15
Protection class	III
Reverse polarity protection	yes
Outputs	
Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	1500
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes
Detection zone	
Sensing range [mm]	2
Real sensing range Sr [mm]	2 ± 10 %
Operating distance [mm]	0...1.62
Accuracy / deviations	
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.3
Hysteresis [% of Sr]	1...15
Operating conditions	
Ambient temperature [°C]	-20...70
Protection	IP 67
Tests / approvals	
EMC	EN 60947-5-2
MTTF [years]	3408

IT5042



Inductive sensor

ITB3002BBPKG/V4A/2M

UL approval	Ta	-20...70 °C
	Enclosure type	Type 1
	power supply	Class 2
	File number UL	E174191

Mechanical data

Weight	[g]	44.3
Housing		cylindrical
Mounting		flush mountable
Dimensions	[mm]	Ø 6.5 / L = 27
Materials		stainless steel; LCP

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	Mounting clamps: 1
----------------	--------------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 2 m, PUR; 3 x 0.14 mm²

Connection

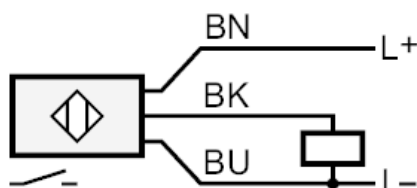

	Core colours
BN	brown
BK	black
BU	blue