


IZ5032



Inductive sensor

IZB30,8-ANKG/V2A

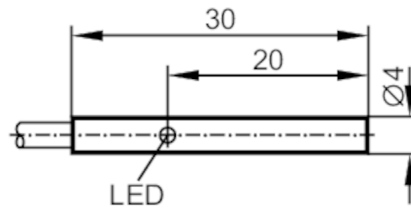

Product characteristics

Electrical design		NPN
Output function		normally open
Sensing range	[mm]	0.8
Housing		cylindrical
Dimensions	[mm]	Ø 4 / L = 30

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		III
Reverse polarity protection		yes

Outputs

Electrical design		NPN
Output function		normally open
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	2000
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	0.8
Real sensing range Sr	[mm]	0.8 ± 10 %
Operating distance	[mm]	0...0.65

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminium: 0.4 / copper: 0.2
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10

Operating conditions

Ambient temperature	[°C]	-25...70
Protection		IP 65

IZ5032



Inductive sensor

IZB30,8-ANKG/V2A

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	class B
MTTF	[years]	2162
UL approval	Ta	-25...70 °C
	Enclosure type	Type 1
	power supply	Class 2
	File number UL	E174191

Mechanical data		
Weight	[g]	45.4
Housing		cylindrical
Mounting		flush mountable
Dimensions	[mm]	Ø 4 / L = 30
Materials		stainless steel (1.4305 / 303); sensing face: POM


Displays / operating elements		
Display	switching status	1 x LED, yellow

Accessories		
Items supplied		Mounting clamps: 1

Remarks		
Pack quantity		1 pcs.

Electrical connection		
Cable: 2 m, PVC; 3 x 0.14 mm ²		

Connection		
------------	--	--

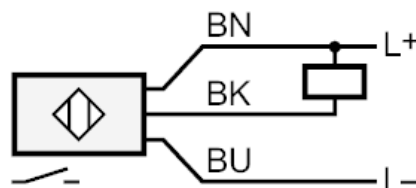

Core colours :
BK = black
BN = brown
BU = blue